

PVC 难燃电线槽管

PVC-U INDUSTRIAL / COMMERCIAL TRUNKING SYSTEMS



LVZHIKE

PROFESSIONAL MANUFACTURER
OF PVC TRUNKING AND PVC PIPE



绿之可
LVZHIKE PLASTIC



ENTERPRISE'S TENET / 公司宗旨

我们的工作是我们的激情
我们的动力是我们的客户
我们的能力没有限制
我们的战略带领我们发展
我们的理念是最好的性价比
我们按客户的需求提供解决方案

OUR PASSION IS FROM OUR WORK
OUR CLIENTS ARE OUR MOTIVATION
OUR CAPACITIES HAVE NO LIMITS

OUR STRATEGY CONTRIBUTE AN ORGANIC DEVELOPMENT TO OUR BRAND
OUR PHILOSOPHY IS BEST QUALITY AT THE MOST COMPETITIVE PRICE
WE PROVIDE SOLUTIONS TO MEET CLIENTS' NEEDS

所有的一切只求一个结果：最大的满意度
热切希望我们和客户共同成长。

ALL OF THIS IS FOR
CLIENTS' SATISFACTION
ONLY CLIENTS GROW WITH US CAN HELP OUR BUSINESS GROW FAST

HONOR CERTIFICATE / 荣誉证书



ABOUT US / 公司介绍



佛山市顺德区绿之可塑料制品有限公司是生产难燃PVC电线槽管、环保排水管的专业生产厂家。公司座落于富饶的珠江三角洲,毗邻香港及澳门两大特别行政区,交通方便。厂房占地面积10000多平方米,生产设备配套完善,年产量达六千吨以上,是目前国内生产PVC-U管材及配套系列最具规模的生产厂家之一。

本公司率先引进国内外先进技术及设备,严格按照国家标准JG3050-1998《建筑用绝缘电工套管及配件》、QB/T1614-2000《难燃绝缘聚氯乙烯电线槽及配件》

及国家有关消防规范等技术法规设计制造所生产的高级管材及配件畅销全国,海外,支持着无数重点工程建设,为我国建筑环保事业作出重大贡献。为应对海外出口市场需要,我们产品通过各项认证:CE, RoHS UL.在我们的全系列产品中,一定能够找到一款满足您安装需求的产品。我们将不断完善和开发新的产品,满足世界各地用户的需求。

Shunde Lvzhike Plastics products Co., Ltd, established in 1998. As a professional manufacturer of PVC trunking and PVC pipe, Lvzhike is highly qualified to custom products based on customers' needs and we can do the OEM and ODM. The factory covers 10,000 square meter which locates in the prosperous Pearl River Delta in southern China, neighboring with Hongkong and Macau and having the sea-land-air transportation network's convenience. Today Lvzhike has been developing more than 11 production lines with modern high-tech equipment, such as Pipe Flaring Machine, Laser Inkjet Machine, Auto-packaging Machine and High Thermal Cutting Machine, which is a provident attempt to join automatic machinery production. Also, our annual product capacity reaches above of 12,000 tons, which is one of the excellent producers at the same industries in China.

Our production is designed and approved by the international and national certification of RoHS, CE and IOS's standards. As an industry forerunner, Lvzhike uses green and environmental-friendly materials in our production process, not only treasuring our workers and customers, but also meeting the world trend. Lvzhike owned a mature group of 150 workers and set up an integrated quality control system to guarantee zero defect rates. Therefore, we have gained high satisfaction rate and numerous returned customers from worldwide. With over than 15 years' experience of export sales, our products enjoy a great popularity in the South America, Africa, Mid-east zone, south and east Asia and so on.

Our service target is OFFER A COMPETITIVE PRICE AND OFFER A HIGH QUALITY TO OUR CUSTOMERS. CLIENTS ARE IN THE FIRST PLACE ALWAYS.

PVC CABLE TRUNKING



PVC 难燃电线槽系列



产品说明

- 产品材质：** 全新料硬质PVC料制成
- 产品认证：** 欧洲CE，欧洲环保RoHS
- 防火等级：** FV-0级；FH-1。遇火不燃烧，防火性及绝缘性特佳。
- 结构：** 由线槽托架和盖子组成。
- 工作温度：** 静态-40℃持续高温至65℃。
- 颜色：** 广泛使用白色，蓝白色，象牙白。可以调其他颜色（有最少量要求）。
- 特点：**
- 1.防火性好，绝缘性高，能够抵抗25千伏电压；耐高温，高温后不容易变形，不影响电线的排布，对电线以及整个电路装置起到一个很好的保护作用。
 - 2.密封式的设计可以更好地防尘，防鼠，外形美观。
 - 3.线槽有强度韧性，耐燃，防火，防潮，耐微碱性，耐老化
 - 4.安装方便：重量轻，易于切割、运输、弯曲和处理，易于用粘合剂无渗漏地连接

备注：底部可以冲孔和做带黏贴性。

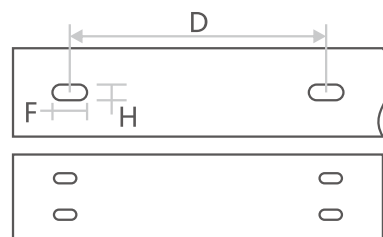


PVC CABL TRUNKING

- Material:** Made of rigid PVC
- Certificates:** CE (Test Standard: EN50085) ; RoHS
- Flammability Rating:** FV-0; FH-1
- Struction:** Made up of bottom and cover.
- Application:** Used in stage, electric apparatus, air conditioning or indoors.
- Work Temperature:** -40°C to 65°C
- Available Color:** Ivory, snow white, bluish white, other color need more MOQ.
- Feature:**
1. Non-conductive: good insulation, able to resist 25KV voltage, assuring a safe system.
 2. Solid design, especially for anti-dust and anti-mouse.
 3. Trunkings have strong tenacity, and are combustion-proof, fireproof, dampproof, alkalescency-resistant, aging-resistant
 4. Easy Installation: light weight, easy to cut, transport, bend and handle; easy connecting by solvent cement and threading joining without leakage
 5. Mini-Trunking has been designed to match in with both the square and radius cornered surface mounted switch and socket boxes.

孔尺寸 (FxH): 8x4mm, 可以做其他尺寸。
Hole Size(FxH): 8x4mm. Other size ask for MOQ.



COMMENT: We can make mounting holes on the bottom of duct or make it to be adhesive trunking.

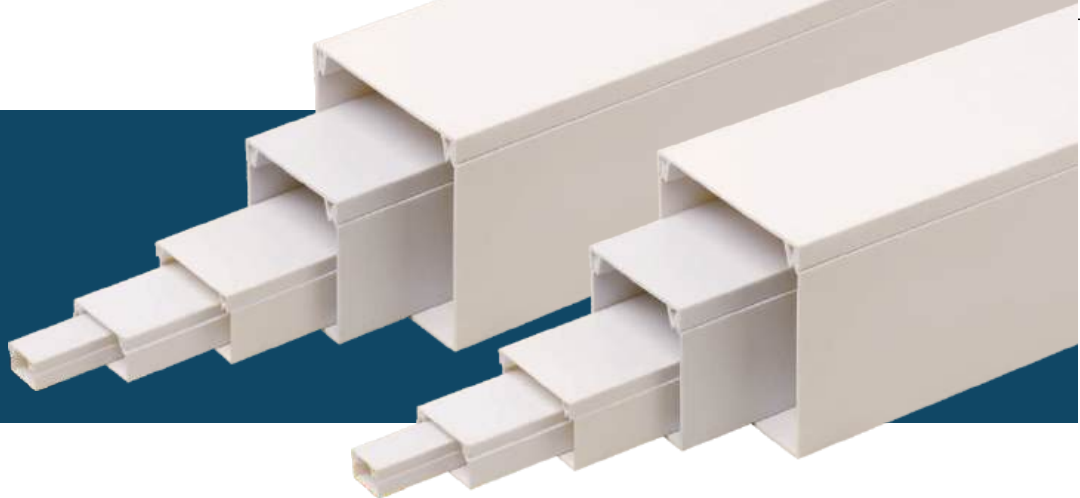

PARAMETER / 参数

单位/Unit : mm

Item.NO. 型号	W x H	Thickness 厚度
PZC-1010	10x10	0.6
PZC-1208	12x8	0.7
PZC-1212	12x12	0.59
PZC-1407	14x7	0.55
PZC-1510	15x10	0.5/0.75
PZC-1515	15x15	0.58
PZC-1616	16x16	0.58/0.63/0.7/0.85/0.95
PZC-2010	20x10	0.5/0.6/0.64/0.7/0.75
PZC-2212	22x12	0.45/0.55
PZC-2313	23x13	0.55/0.61
PZC-2414	24x14	0.7/0.83
PZC-2415	24.5x15.5	0.6/0.63/0.75
PZC-2512	25x12	0.6
PZC-2516	25x16	0.58/0.63/0.7/0.75/0.87
PZC-2525	25x25	0.8/0.95
PZC-2913	29x13	0.9
PZC-3015	30x15	0.68/0.76/0.9
PZC-3030	30x30	1.1
PZC-3817	38x17	0.66
PZC-3919	39x19	0.8/0.9/1.15
PZC-4016	40x16	0.62/0.7/0.97

Item.NO. 型号	W x H	Thickness 厚度
PZC-4025	40x25	0.68/0.74/0.8/1.0/1.4
PZC-4040	40x40	1.1/1.3
PZC-5025	50x25	0.8/0.97/1.4
PZC-5050	50x50	1.1/1.2/1.45
PZC-5922	59x22	0.78/1.08
PZC-6040	60x40	1.08/1.2/1.33/1.45
PZC-6060	60x60	1.3/1.63
PZC-7550	75x50	1.2/1.45/1.75
PZC-7575	75x75	1.35/1.5/1.75
PZC-8040	80x40	1.2/1.55
PZC-8050	80x50	1.26/1.6/1.8
PZC-8080	80x80	1.6
PZC-10027	100x27	0.9/1.1
PZC-10040	100x40	1.35/1.55
PZC-10050	100x50	1.35/1.68/2.2
PZC-10060	100x60	1.65
PZC-10075	100x75	1.65
PZC-100100	100x100	1.6/2.0
PZC-12080	120X80	2
PZC-150100	150X100	2
PZC-200100	200X100	2.4

Remark: We can adjust the thickness according to client's request.
备注：可以根据客人需要的厚度订做。

PVC ELECTRICAL PIPE

PVC难燃电线管 >>>


产品说明

- 产品材质：** 全新料硬质PVC料制成
- 产品认证：** 欧洲CE，欧洲环保RoHS
- 防火等级：** FV-0; FH-1。遇火不燃烧，防火性及绝缘性特佳。
- 工作温度：** 静态-40℃持续高温至65℃。
- 颜色：** 广泛使用白色，蓝白色，象牙白。可以调其他颜色（有最少量要求）。
- 特点：**
- 1. 耐腐蚀性能:抗酸、碱和盐,保证较低的维护成本,较长使用寿命
 - 2. 穿线管有强度韧性,耐燃,防火,防潮,耐微碱性,耐老化
 - 3. 强冲击强度:抗压缩和冲击,适合被埋在混凝土

PARAMETER / 参数

单位/Unit : mm

Item.NO. 型号	Specification 外径 D	Thickness 厚度 T	Packing(pcs/bag) 包装(条/扎)
SDO-16W	φ 16	0.8/0.9/1.1/1.2	25
SDO-20W	φ 20	1/1.1/1.2/1.3/1.45/1.8	25
SDO-25W	φ 25	1.1/1.2/1.3/1.4/1.65/1.75	25
SDO-32W	φ 32	1.25/1.5/2.4	10
SDO-40W	φ 40	1/1.5/1.6	10
SDO-50W	φ 50	1/1.5/1.6	5

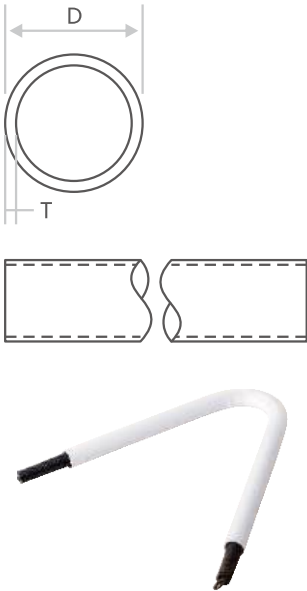

质量测试示范：

操作过程： 首先选取与管径配套的弹簧，然后把弹簧插入到需要线管里面需要弯曲的位置，用手弯曲线管即可。

效果： 线管可以随意弯曲到180°不会爆裂。

冷弯管的好处： 当线管用于墙壁角落布线时，可以直接弯曲线管，不用管弯头。

Quality Test：

Operation: Insert a matching size of the spring into the PVC pipe. Curve/Bend the pipe at the location of the spring.

Effect: PVC pipe can be bent from 5° to 180°without broken.

Advantage: Clients can bend the pipe at the corner without using PVC accessories to connect.

PVC ELECTRICAL FLARED PIPE

PVC难燃扩口电线管




PVC Electrical Pipe

- Material:** Made of rigid PVC
- Certificates:** CE (Test Standard: EN61386) ; RoHS
- Flammability Rating:** FV-0; FH-1
- Work Temperature:** -40°C to 65°C
- Available Color:** Ivory, snow white, bluish white, other color need more MOQ.
- Characteristics:**
1. Corrosion Resistance: resistant to acids, alkali and salts, assuring a lower maintenance cost and enjoy a longer service life
 2. PVC pipes have a strong tenacity, and advantages of combustion-proof, fireproofing, damp proof, alkalescency-resistant, aging-resistant
 3. High impact strength: resistant to compression and strike, suitable to be buried in the concrete

PARAMETER / 参数


单位/Unit : mm

Item.NO. 型号	d 细外径	D 宽口直径	Thickness 厚度	Packing(pcs/bag) 包装(条/扎)
SDOL-16W	φ 16	φ 18.6	0.8 /0.9 /1.1 /1.2	30
SDOL-20W	φ 20	φ 22.5	1 /1.1 /1.2 /1.3 /1.45	25
SDOL-25W	φ 25	φ 27.5	1.1 /1.2 /1.3 /1.4 /1.75	25
SDOL-32W	φ 32	φ 34.5	1.25 /1.5	10

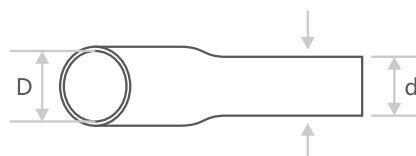

ACCESSORIES 配件

线管配件 PVC Pipe Accessories

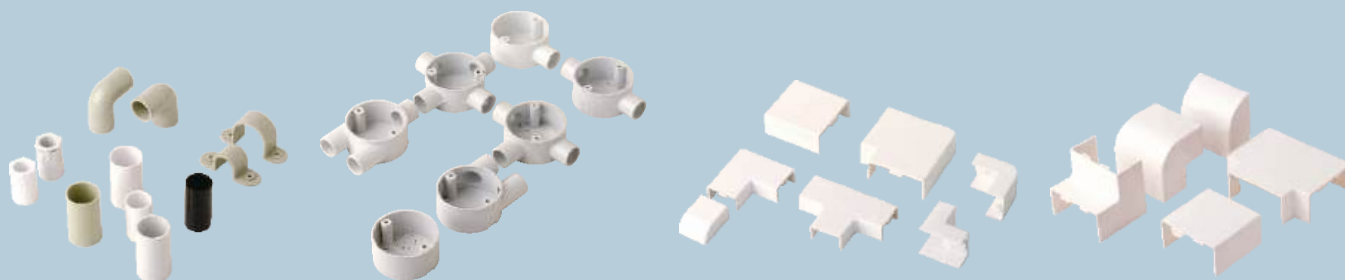

PVC

ARC FLOOR CABLE TRAY

PVC 弧形线槽 >>>



产品说明

产品材质： 采用硬质PVC料制成

产品认证： 欧洲CE，RoHS

防火等级： FV-0级; FH-1。低烟，良好自灭性，绝缘性特佳。

产品构造： 有槽底和槽盖组成，槽底可以附双面胶。

工作温度： -40摄氏度持续高温至80摄氏度。

颜色种类： 白色，米白色，灰色。其他颜色接受定做。

使用方法： 将地板擦干净后，再将地槽双面胶撕开，黏贴固定于地板上，随后装入电线，盖上槽盖即可。

特点： 1.圆弧槽盖造型设计，具美观及抗重压之功能，不绊倒人及更易于搬运车通过。
2.配线槽85°C内不易断裂，变形，变色，装配省时便利。
3.密封式无出线孔，能防尘、防鼠，适用于工程施工及建厂之导线或配明线用。

长度说明： 默认出货为2米。其他长度可定做。


PRODUCT DESCRIPTION

- High quality of adhesive tape on the back of the trunking for stable fixture.
- Good for floor wiring to facilitate the transit of the trolley and to avoid tripping, especially in public places, like shopping malls, hospitals, and stations.
- Material: PVC
- Fireproof level: FV-0; FH-1. Low smoke; Electrical insulation
- Length: 2 M
- Color: White, Yellow and Grey. Other color need more MOQ.
- Working temperature:-40°C to 80°C.
- Not easy to reform, crack and discolor in 85°C.


PARAMETER / 参数

单位/Unit : mm


Item.NO. 型号	Size 尺寸				Thickness 厚度		Packing(pcs/bag) 包装(条/扎)
	W 底宽	W ₁ 内宽	H 外高	H ₁ 内高	T ₁ 盖	T ₂ 底	
ACT-25x10	27	18.2	9.8	7.6	1.2	1	30
ACT-35x10	33.5	20.3	10.8	8.5	1.1	1.3	25
ACT-48x14	45.6	26.7	13.7	11	1.2	1.3	20
ACT-50x15	49.5	33.3	14.8	13	1.1	1	20
ACT-65x15	65.8	46.2	16.8	13.2	1.6	2.2	15
ACT-100x25	96	67.8	24.3	20.3	2	1.8	10



ACT-25




ACT-35, 48, 65



ACT-48, 50, 100



ACT-25

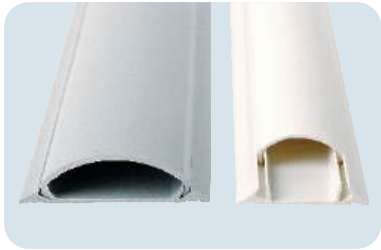

ACT-35,48,65



ACT-100




TELEPHONE WIRING DUCT

梯形日式电话槽 >>>



产品说明

产品材质： 采用硬质PVC料制成
产品认证： 欧洲CE，RoHS
防火等级： FV-0级; FH-1。低烟，良好自灭性，绝缘性特佳。
产品构造： 有槽底和槽盖组成，槽底可以附双面胶。
工作温度： -40摄氏度持续高温至80摄氏度。
颜色种类： 白色，黄色，灰色。其他颜色接受定做。
使用方法： 将地板擦干净后，再将地槽双面胶撕开，黏贴固定于地板上，随后装入电线，盖上槽盖即可。
产品特性： 电话机配线，办公桌上布线，电信局配线用，保护电线，高级美观。
长度说明： 默认出货为1米。其他长度可定做。

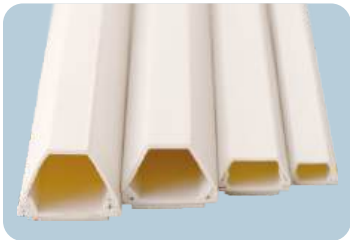

PRODUCT DESCRIPTION

- Smooth corners and edges that will not abrade wiring or irritate hands.
- Integrated nonskid liners and unique cover designs insures the ducts' cover will not slide once install or during vibration
- Specially formulated lead-free PVC material meet the lame retardant requirements.
- Material: PVC
- Length: 1 meter; Other length can be customized
- Fireproof level: FV-0; FH-1. Low smoke; Electrical insulation
- Working temperature:-40°C to 80°C
- Not easy to reform, crack and discolor in 85°C




PARAMETER / 参数

单位/Unit : mm

Item.NO. 型号	Size 尺寸			Packing (pcs/CTN)
	W 底部宽度	W1 顶部宽度	H 外高度	
A-ECT-01	13.50	9.00	7.00	100
A-ECT-02	17.50	11.50	8.30	100
A-ECT-03	19.00	13.00	9.80	50
A-ECT-04	21.70	13.50	14.80	50
A-ECT-05	25.60	12.00	16.80	50
A-ECT-06	27.80	11.00	19.50	50

Equip with a complete series of sizes



PVC COMPARTMENT TRUNKING

难燃分隔式难燃线槽 >>>



产品说明

PVC-U型分隔式线槽属于广泛被采用的深度50mm系列大线槽，适用于安装规格大、数量多的电线。

有两种不同的宽度--180mm 和 100mm。

灵活滑动盖设计，方便安装电线和开关盒。

有效灵活地把电线按需分隔。

PRODUCT DESCRIPTION

Compartment PVC-U is an attractive 50mm deep trunking system and suitable for large quantities of cable.

- Available in two widths-180mm and 100mm.
- Slidable cover
- Extra deep accessory boxes.

model#1: 3 divided spacers separated 4 available rooms

model#2: 2 divided spacers separated 3 available rooms


简易分拆式 SIMPLE SPLIT TYPE

PARAMETER / 参数

Item.NO. 型号	Size 尺寸 (mm)		Thickness 厚度(mm)	Remark 备注	Packing (pcs/bag) 包装 (条/扎)
	Width 宽度	Height 高度			
SCT3-100	100	50	1.4	3 spacers	2
SCT2-100	100	50	1.3/1.4	2 spacers	2

Special Characteristic : Trunkings can be divided into three or four compartments using clip-in dividing spacers.

产品特性：把区间通过间隔片平均划分成3-4个间隔，也可以选择性按需要插入挡片。

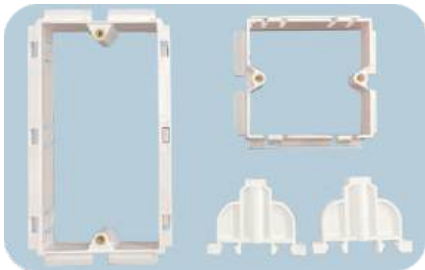

PVC Dado Skirting Trunking

Cable Management Systems

装配组合式



性能指标

- 耐变形性能：** 每米长度中每平方厘米横截面施加0.13kg的负荷，2小时后最大变形量，高度方向>10%，宽度方向>10%
- 冲击性能：** -5℃低温下，2小时，1.0kg（轻型）或2.0kg（中型）锤，高度100±1mm，相应冲击能量下，试样无肉眼可见裂纹
- 耐热性能：** 60±20℃条件下直径5mm的钢珠施加20N的力，压在试样表面上，表面上压痕直径<2mm
- 绝缘性能：** 50HZ、2500V、交流电60秒不击穿，绝缘电阻不低于100兆欧
- 适用范围：** 主要用于明装配线工程中，对电线、电话线、有线电视、网络线路等起到保护作用。特别适合于大厦、学校、医院、商场、宾馆、厂房的室内配线及线路改造工程。

特性： 86型开关面板和插座面板用固定架可直接装在线槽上，配件齐全，不需要暗盒。

PERFORMANCE

- Deformation resistance:** per meter length is applied per square centimeter of cross section of 0.13kg load. 2 hours after the maximum deformation, the height direction > 10%, the width direction > 10%
- Impact properties:** -5 °C low temperature, 2 hours, 1.0kg (light) or 2.0kg (medium) hammer, height 100 ± 1mm, the corresponding impact energy, the sample no visible cracks
- Heat resistance:** 60 ± 20 °C under the conditions of 5mm diameter ball 20N applied force, the pressure on the specimen surface, surface indentation diameter <2mm
- Insulation:** 50HZ, 2500V, AC 60 seconds without breakdown, the insulation resistance of not less than 100 megohms.


Mainly used open electrical wire installation project, such as cable, telephone line, network lines, etc. The trunking plays a role of protection. This design of the product is particularly suitable to apply in the sites of buildings, schools, hospitals, shopping malls, hotels, factories and indoor wiring and wiring renovation project.

Advantage: 86-type switch socket panel can be mounted directly on the holder without deep gang box.


PARAMETER / 参数

Item.NO. 型号	Size 尺寸 (mm)						Thickness 厚度(mm)	Packing (pcs/bag) 包装 (条/扎)
	External Size 外尺寸		Internal Size 内尺寸					
	W	H	H1	W1	W2	W3		
FCT2-180	180	50	32	41	80	41	1. 9	1

MOQ: 1500 METER




ACCESSORIES / 配件

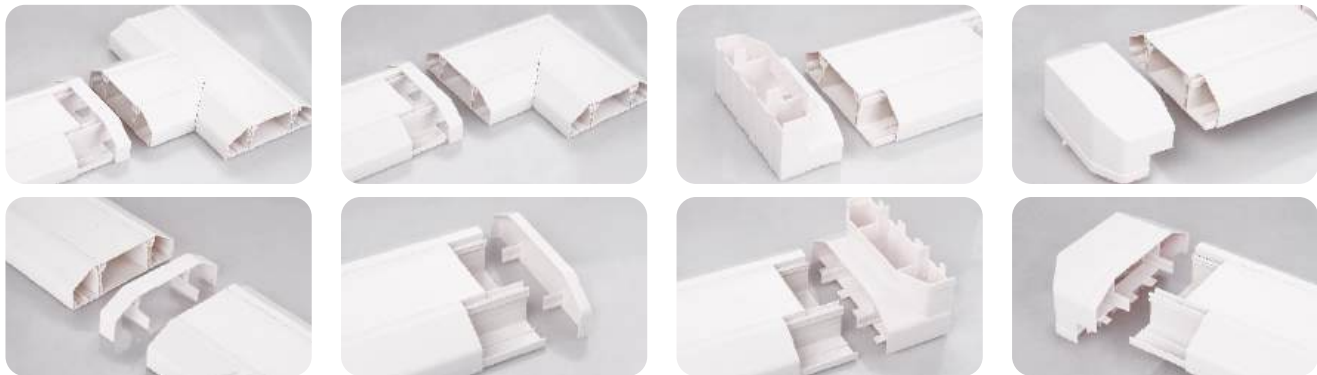

PVC WIRING DUCT

PVC环保阻燃行线槽 >>>

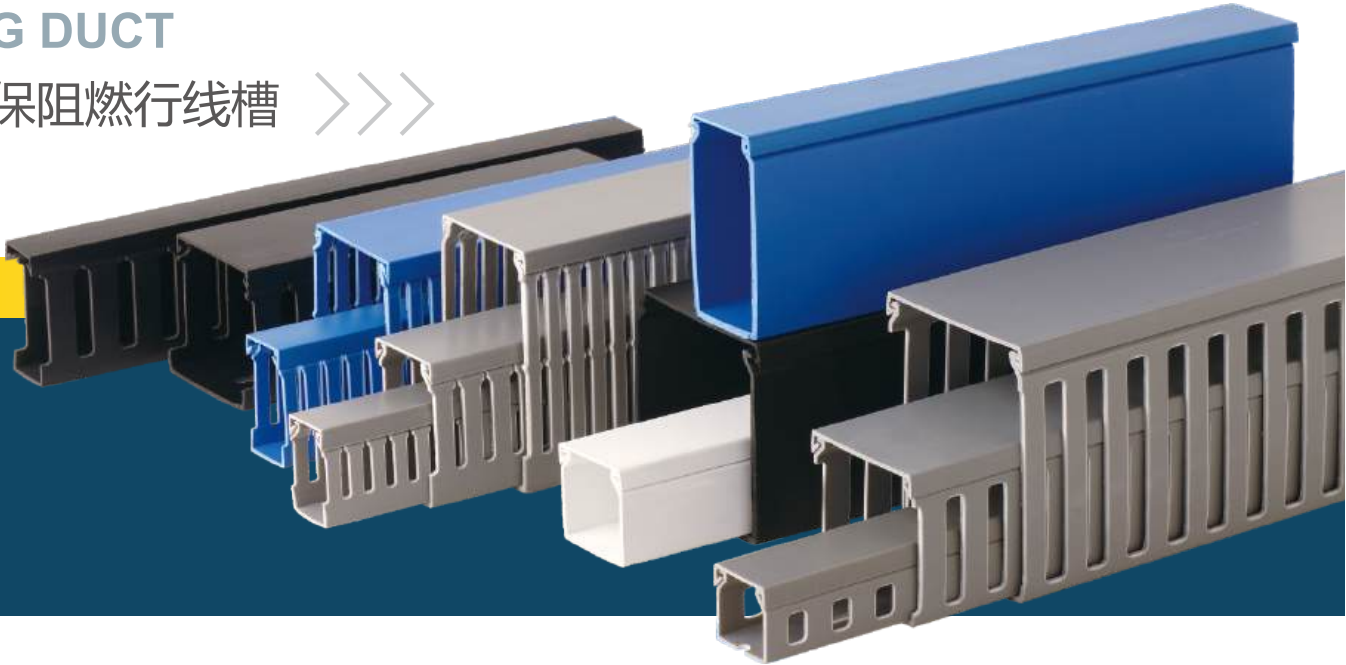

产品说明

产品材质： 采用低卤素硬质PVC料制成，环保无污染，不含铅等有毒物质。
产品认证： 美国UL： E306674 欧洲CE， 欧洲环保RoHS， REACH。
防火等级： UL84V-0， 低烟微卤， 离火不燃烧， 防火性及绝缘性特佳。
产品构造： 有槽底和槽盖组成。
工作温度： 静态-40℃持续高温至70℃。
颜色种类： 灰色， 白色， 蓝色， 黑色（灰色为常规库存产品， 其他颜色有起订量要求）



PRODUCT DESCRIPTION

Made of rigid PVC
Certificates: UL:E306674 CE:EN50085 RoHS, REACH.
UL Recognizd continuous use temperature:50℃ (122°F)
UI94 Flammability Rating of V-0
Available Colors: gray is the common color, other color need more MOQ
Work Temperature: -40℃ to 65℃
The ingenious clip-on lid is easily removed by the contractor for maintenance or alteration of the cabling system.

PARAMETER / 参数

单位/Unit : mm


Item.NO. 型号	H x W	Thickness 厚度	Item.NO. 型号	H x W	Thickness 厚度
PXC-2015	20x15	0.9	PXC-5040	50x40	1.4
PXC-2020	20x20	1.0	PXC-5045	50x45	1.4
PXC-2520	25x20	1.1	PXC-5050	50x50	1.4
PXC-2525	25x25	1.1	PXC-5055	50x55	1.4
PXC-2550	25x50	1.1	PXC-5080	50x80	1.4
PXC-3015	30x15	1.1	PXC-6025	60x25	1.5
PXC-3025	30x25	1.1	PXC-6035	60x35	1.5
PXC-3030	30x30	1.1	PXC-6040	60x40	1.5
PXC-3035	30x35	1.3	PXC-6060	60x60	1.5
PXC-3040	30x40	1.3	PXC-60100	60x100	1.6
PXC-3530	35x30	1.3	PXC-6525	65x23	1.6
PXC-3535	35x35	1.3	PXC-6532	65x32	1.6
PXC-3560	35x60	1.3	PXC-6545	65x45	1.6
PXC-4030	40x30	1.3	PXC-6565	65x65	1.6
PXC-4035	40x35	1.3	PXC-8030	80x30	1.6
PXC-4040	40x40	1.3	PXC-8040	80x40	1.6
PXC-4525	45x25	1.4	PXC-8050	80x50	1.6
PXC-4533	45x33	1.4	PXC-8060	80x60	1.6
PXC-4545	45x45	1.4	PXC-8080	80x80	1.7
PXC-5025	50x25	1.4	PXC-80100	80x100	1.7
PXC-5030	50x30	1.4	PXC-10060	100x60	1.8
PXC-5035	50x35	1.4	PXC-100100	100x100	1.9

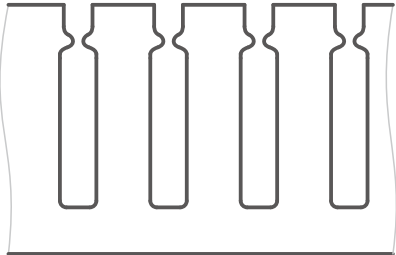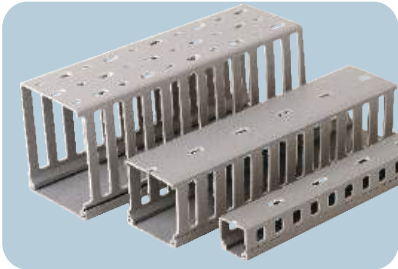

默认底孔单排孔/Comomon hole

HALOGEN-FREE TRUNKING

低烟无卤环保阻燃线槽&线管 >>>

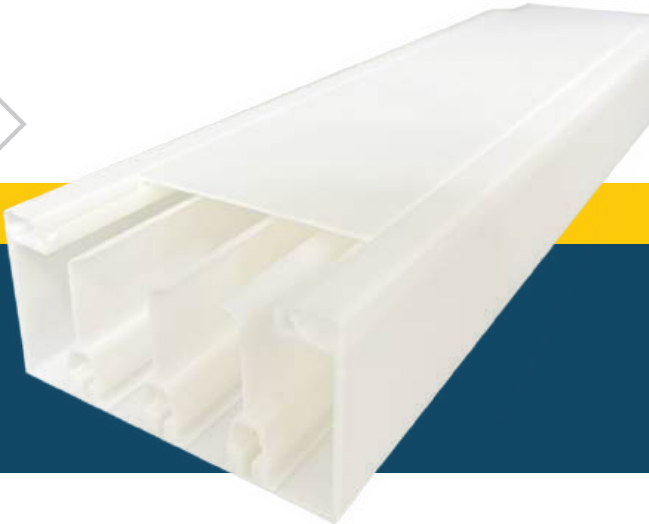

产品说明

产品材质： 采用低烟无卤素PC+Abs材料制成，环保无污染，不含铅等有毒物质。
产品认证： 欧洲RoHS、CE、UL94 V-0等级测试（业内公认的标准）。
防火等级： UL94 V-0等级测试（业内公认的标准），离开明火后能在10秒内熄灭，并且没有燃烧物滴落。
产品构造： 有槽底和槽盖组成。
工作温度： 静态-40℃持续高温70℃。
颜色种类： 白色，其他颜色有起订量要求。

PRODUCT DESCRIPTION

Made of PC+Abs
Certificates: RoHS CE UL94 V-0.
UL Recognizd continuous use temperature:50℃ (122°F)
UL94 Flammability Rating of V-0
Available Colors: White; other color need more MOQ
Work Temperature: -40℃ to 70℃
Operating Environment:Hospital;data center,commercial building,etc.



PVC TRUNKING WITH DIVISION

南美款PVC线槽带隔片 >>>



Item.NO. 型号	H x W	Thickness 厚度	Item.NO. 型号	H x W	Thickness 厚度
PZN-1616	16x16	0.80	PZD-4025	40x25	1.00
PZN-2525	25x25	0.90	PZD-5025	50x25	1.10
PZN-4025	40x25	1.00	PZD-5050	50x50	1.20
PZN-5025	50x25	1.10	PZD-6040	60x40	1.25
PZN-5050	50x50	1.15	PZD-7550	75x50	1.20
PZN-6040	60x40	1.25			
PZN-7550	75x50	1.30			

PVC

PVC TRUNKING: SPECIAL DESIGN

异型材部分



>>>

微型线槽 MINI- TRUNKING

PARAMETER / 参数

单位/Unit : mm

Item.NO. 型号	Size 尺寸	Thickness 厚度
MMT-2010	20x10	0.5/0.6/0.65/0.7/0.8
MMT-2210	22.6x10	1.1/1.2
MMT-2516	25x16	1.12
MMT-3030	30x30	1.1
MMT-3212	32x12	0.85/1.0
MMT-3817	38x17	1.2
MMT-4020	40x20	1.1
MMT-5035	50x35	1.5
MMT-7550	75x50	1.6
MMT-7575	75x75	1.8
MMT-8060	80x60	1.7
MMT-10050	100x50	1.8
MMT-10060	100x60	2
MMT-10075	100x75	2
MMT-10080	100x80	2
MMT-100100	100x100	2
MMT-150100	150x100	2
MMT-200100	200x100	2.4

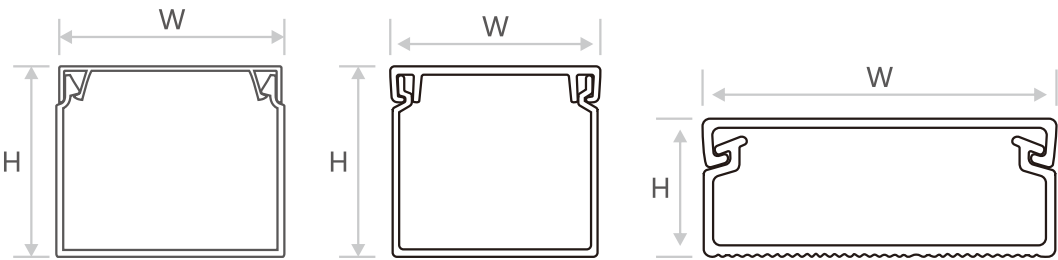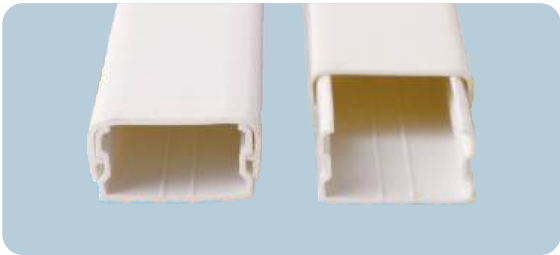

DOUBLE-COATED FOAM TAPE

双面胶 >>>



产品说明

产品特征： 专门设计用于各种塑料线槽。粘性强。宽度可以根据不同的线槽宽度定制。

产品颜色： (1)覆盖层：白色，红色，蓝色，黄色。其他颜色可以定做。

(2)黏胶层：白色，黑色。其他颜色可以定做。

PRODUCT DESCRIPTION

Feature: Special glue used for wiring duct. Strong stickiness after a number of tests in the professional lab.




Different colors and widths can be made.

Colors: (1) COVER: white, red, blue, yellow. Other color need more MOQ.

(2) Tape: white, black. Other color need more MOQ.

PARAMETER / 参数

Item.NO. 型号	Cover Material 面层材质		Tape Material 黏胶材质	
	PET release tape 纸	PE film 薄膜	Foam tape 泡棉	PE tape 高密度泡棉
ADT-001	√		√	
ADT-002		√	√	
ADT-003		√		√

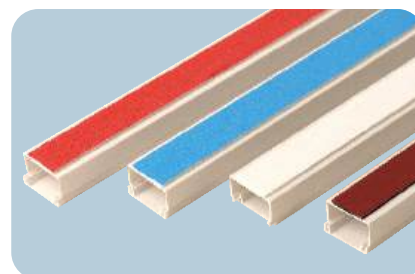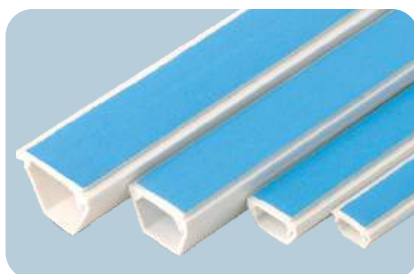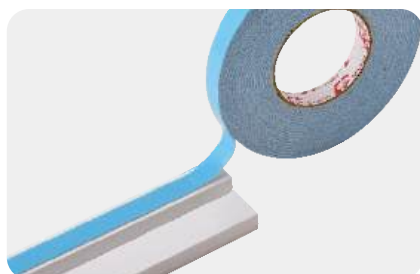



佛山市顺德区绿之可塑料制品有限公司

地址：广东省佛山市顺德区勒流镇江义工业区东二路20号

电话：+86 757 25666339 25669955 传真：+86 757 25662939 邮箱：hdl@lvzhike.com.cn

FOSHAN CITY SHUNDE AREA LVZHIKE PLASTIC PRODUCTS CO.,LTD

Add. : No. 20, DongEr Rd., Jiang Yi Inudustrial zone, LeLiu, Foshan, Guangdong, China

E-mail: hdl@lvzhike.com.cn

Tel: +86 757 25666339 25669955

Fax: +86 757 25662939

Mobile/WhatsApp: +86 13928601520

<http://hidaly.en.alibaba.com> / www.lvzhike.com.cn